


**Chrysler Airtemp  
2000/3000 Series Compressors  
Lubricating Oil and CFM Information**

Hermetic Model	Open Shaft	Cylinders	Oil Charge	Bore x Stroke	CFM @1750 RPM
3020	2020	4	22 Pints	3.000 x 1.84	52.72
3025	2025	4	22 Pints	3.000 x 2.29	65.58
3030	2030	4	22 Pints	3.000 x 2.75	78.75
3040	2040	4	22 Pints	3.375 x 2.75	99.94
3050	2050	4	32 Pints	3.750 x 2.75	123.03
3060	2060	5	34 Pints	3.750 x 2.75	153.78
3075	2075	6	34 Pints	3.750 x 2.75	184.53
3000	2000	8	36 Pints	3.750 x 2.75	246.05

These compressors use 300 SUS viscosity refrigeration Oil. Dallas Hermetic Company recommends the use of Zerol (tm) 300 refrigeration oil to avoid swelling of the unloader assembly piston "O" rings.

Operating oil pressure for all models is 40 to 60 psi above suction pressure.

8 pints = 1 gallon.

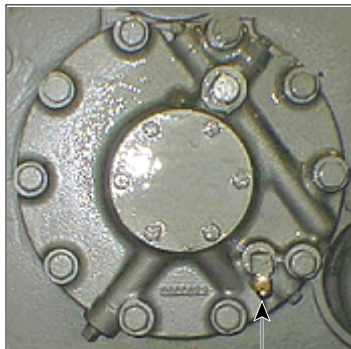

Oil pressure port.